

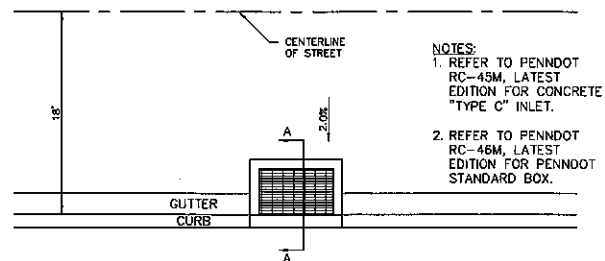
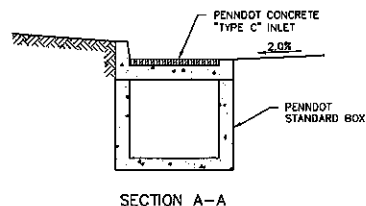



VERTICAL CURB SIDE INLET DETAIL
N.T.S.

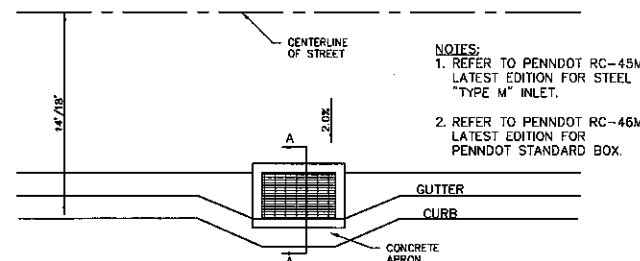

INTEGRAL CURB AND GUTTER SIDE INLET DETAIL
N.T.S.

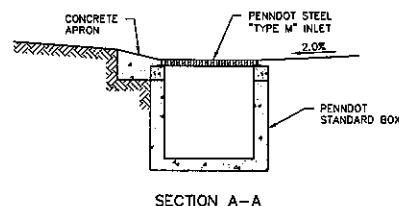


ROLLED CURB SIDE INLET DETAIL
N.T.S.

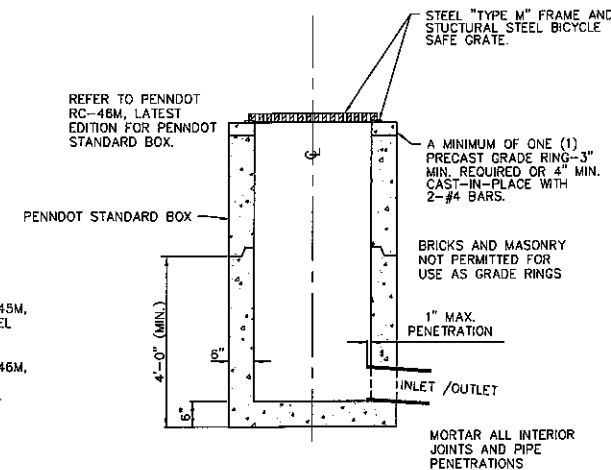


STANDARD INLET


N.T.S.
CONCRETE - 4000 PSI
REINFORCEMENT - ASTM A615 GRADE 60
ENTRAINED AIR - 5.0% - 8.0%

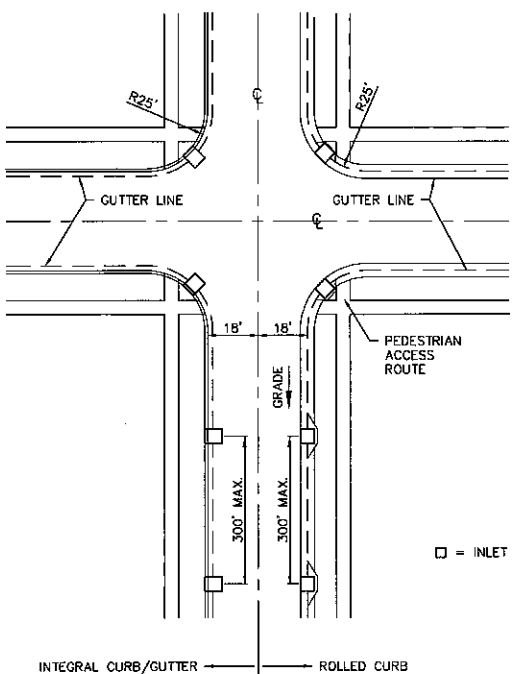


INLET LOCATIONS FOR USE IN COMMERCIAL/INDUSTRIAL DISTRICTS
N.T.S.

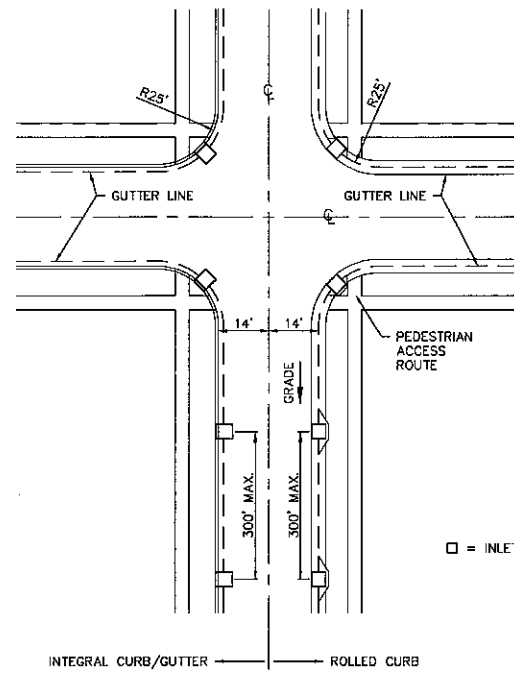


INLET LOCATIONS FOR USE IN RESIDENTIAL DISTRICTS
N.T.S.

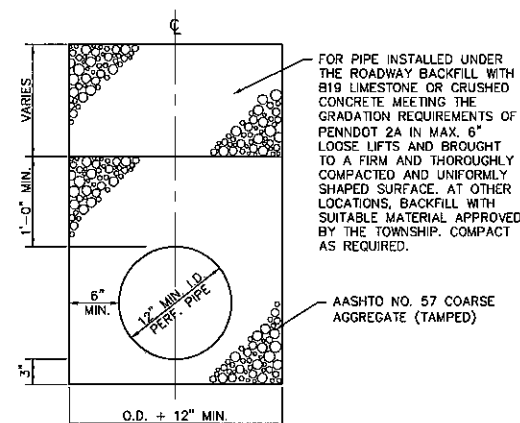

STORMWATER PIPE INSTALLATION
N.T.S.

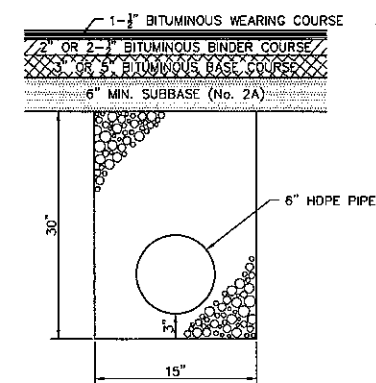

TYPICAL SUBDRAIN
N.T.S.

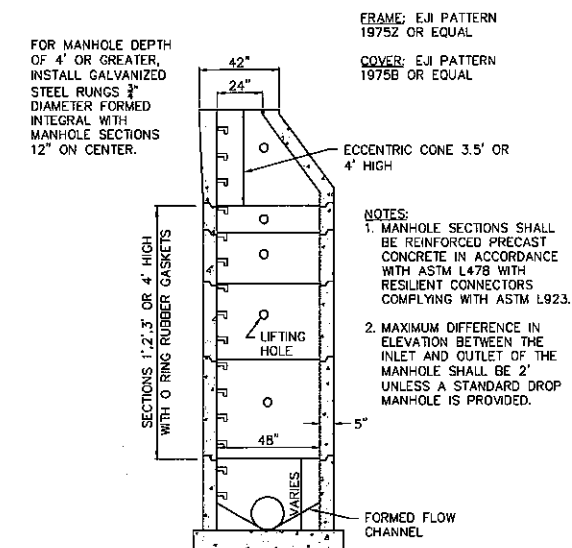

PRECAST CONCRETE MANHOLE
WITH "O" RING RUBBER GASKETS
N.T.S.

SHEET 2 OF 2

STANDARD DETAILS FOR STORM SEWER AND PAVEMENT CONSTRUCTION

SUMMIT TOWNSHIP
ERIE COUNTY, PENNSYLVANIA
NOT TO SCALE
JULY 2012

